

Using host color correction

Note *Host color correction is available only with Windows 95.*


Color correction from the host (your computer) attempts to match the screen's colors to the printer's colors. The software for the Phaser 340 printer includes a profile that contains specific color information required by the host color correction system.

You can adjust an image's colors on the computer, or use the TekColor color corrections to adjust an image's colors in the printer. You should use only one color correction method at a time, or you may get unexpected results.


To use host color correction, do the following:

1. Set up the Phaser 340 printer with the Windows 95 driver.
2. In the **Printers** window, move the cursor over the Phaser 340 printer icon, and click the right mouse button.
3. In the menu that appears, click **Properties**; the **Properties** dialog box appears.
4. Click the **Graphics** tab.


5. In the **Color Control** field, select the **Use image color matching** option, then click the **Choose image color matching method** button.

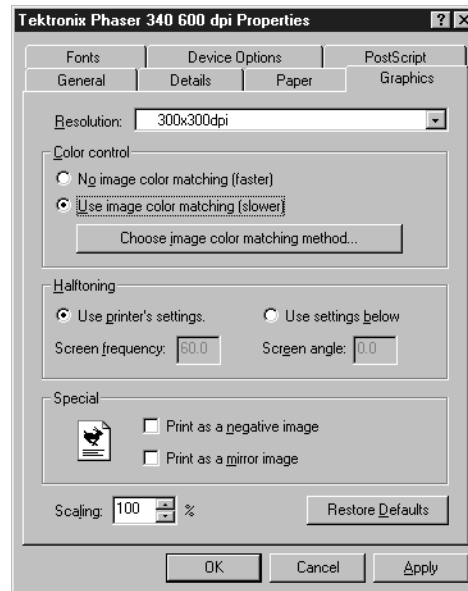

6. In the **Image Color Matching** dialog box, select **Perform image color matching on the host**, and click **OK**.

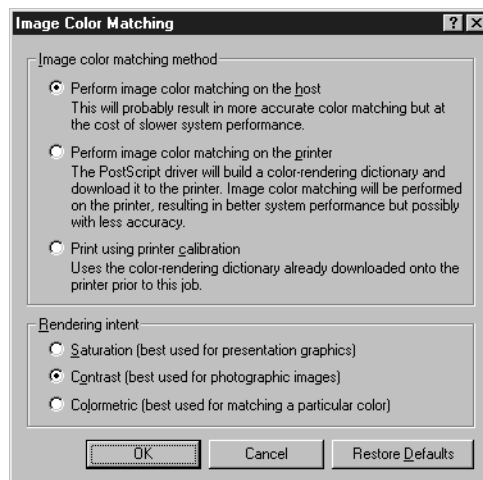

7. Click the **Device Options** tab to see the following options:

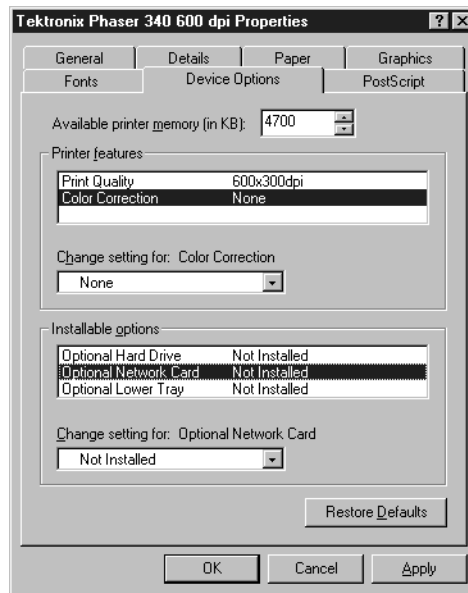

8. Highlight **Color Correction** in the **Printer features** field.
9. Select **None** in the **Change setting for: Color Correction** field.
10. Click **OK** when finished.