

Using the LaserWriter 8.x printer driver

You can use Apple's LaserWriter driver version 8.x with a Phaser 540 printer. Some applications, such as Aldus PageMaker 5.x, use the LaserWriter 8.x driver instead of the Tektronix driver.

Installing the LaserWriter 8.x driver

Note *During installation, the LaserWriter 8.x driver leaves other versions of the LaserWriter driver intact so that this driver can co-exist with the Tektronix driver.*

Refer to the LaserWriter driver's documentation, *LaserWriter 8.x Update Guide*, for instructions on installing the driver.

Using the LaserWriter 8.x driver with a Phaser 540

The LaserWriter 8.x driver uses printer-specific 4.x PPDs (PostScript Printer Description files) for information on a printer's page sizes, printing options, and media type options. To use the LaserWriter 8.x driver with a Phaser 540 printer, perform the following steps. If the printer is busy, it may take some time to complete this procedure; you may want to perform it when the printer is idle. You only have to configure the printer once.

1. The *Phaser 540 Apps.sea* archive file on the Macintosh Driver and Printer Utilities diskette contains printer description files for the printer. Decompress these files, then continue with the steps listed below.
2. Locate the *4.x PPDs Folder* in the folder on your hard disk containing decompressed files.


Open the folder and place the *TKPH5401.PPD* file with the other PPDs for the LaserWriter 8.x driver in the *Printer Descriptions* folder, in the *Extensions* folder, inside the *System Folder*.

3. Open the **Chooser**.

4. Select the **LaserWriter 8.x** driver icon.
5. Select your printer from the list.
6. From the **Chooser**, click the **Setup** button to see a list of options.
7. In the dialog box that appears, click the **More Choices** button to see the full range of options.

Note *Do not use the **Auto Setup** button; errors can occur with the PPD files. Continue with this procedure to properly set up the driver.*

8. Click the **Printer Info** button, then click the **Update info** button in the next dialog box.
9. Record the information for **PostScript Version** and **Total Memory Installed**; you will need this information later. Click **OK**.
10. Click the **Select PPD** button. The *Printer Descriptions* folder in the *Extensions* folder, inside the *System* Folder, appears.

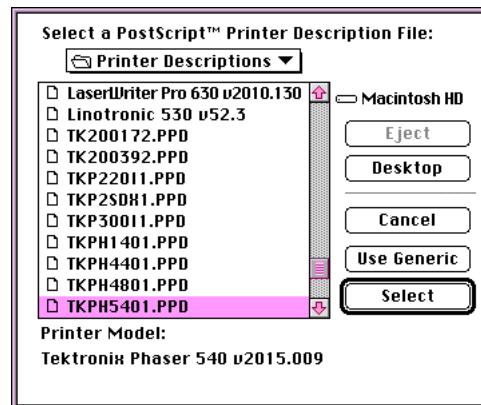

11. Select the *TKPH5401.PPD* file. Make sure that the information under **Printer Model** matches the printer you have and the **PostScript Version** information you obtained in Step 9.

12. Click **Select**.

Note *If the information under **Printer Model** is not an exact match, use the closest printer name, and call Tektronix Customer Support in the U.S. and Canada at **1-800-835-6100** for the latest PPD file. Outside the U.S. and Canada, contact your local Tektronix reseller. You can also download the latest PPD files from the Tektronix Bulletin Board Service (BBS).*

13. Click **Configure**. In the field for **Memory Configuration** under **Installable Options**, select the amount of memory your printer has installed. Check other options, either **Installed** or **Not Installed**, as appropriate.
14. Click **OK** in two dialog boxes and close the **Chooser**.
15. Open the **Page Setup** dialog box to see a pop-up menu with all the printer's supported paper sizes.
16. Open the **Print** dialog box to select the paper source.
17. In the **Print** dialog box, click the **Options** button to open the **Print Options** dialog box.

Printer-specific **TekColor** features are listed at bottom of the dialog box.